




AXIAL MOUNT RESISTORS

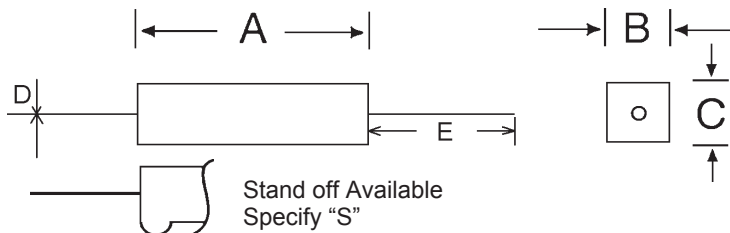


All dimensions $\pm .062$ "

Mills P/N	Watts	A	B	C	D	E	Std Range Ω	Max Ω
MRW02	2	0.688	0.250	0.250	0.032	1.250	.01 - 350	4K
MRW03	3	0.875	0.312	0.312	0.032	1.250	.01 - 500	6K
MRW05	5	0.875	0.375	0.375	0.032	1.250	.01 - 500	6K
MRW07	7	1.375	0.375	0.375	0.032	1.250	.01 - 1.0K	12K
MRW10	10	1.875	0.375	0.375	0.032	1.250	.01 - 1.5K	25K
MRW15	15	1.875	0.500	0.500	0.032	1.250	.01 - 2.5K	36K
MRW22	22	2.500	0.500	0.500	0.032	1.250	.01 - 3.8K	56K

VERTICAL MOUNT RESISTORS

Designed for limited board space, these resistors offer the same power dissipating capabilities as our standard ceramic cement encased resistors.

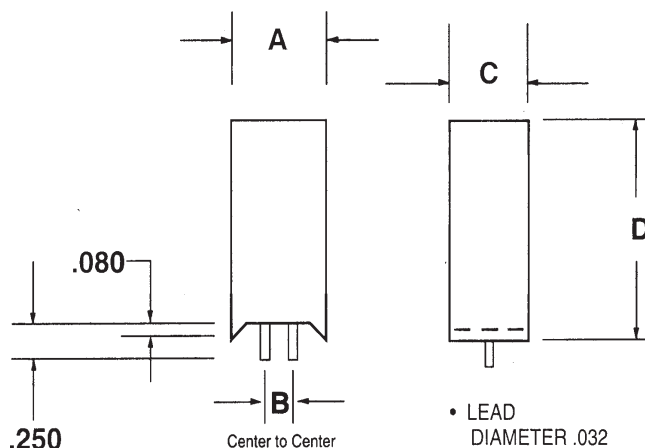

Mills P/N	Watts	A	B	C	D	Std Range Ω	Max Ω
MRW2R	2	0.435	0.200	0.260	0.820	.1 - 500	1K
MRW3R	3	0.475	0.200	0.330	0.975	.1 - 500	1.3K
MRW5R	5	0.500	0.200	0.380	1.000	.1 - 500	1.5K
MRW7R	7	0.520	0.200	0.380	1.520	.01 - 5.0K	15K
MRW10R	10	0.630	0.312	0.500	1.375	.01 - 6.0K	15K